

# Flammable and Toxic Gas Detector

**Model: SGD-2000**


## Features:

SGD-2000 is cutting edge fixed gas detector, to detect wide range of flammable and toxic gases available in Infra-red, catalytic, Electrochemical and PID sensor. It is diffusion type gas detector with high stability, reliability and accuracy in response.

Additional to 4-20 mA output, 2 Alarm relay outputs considered to connect to universal FACP's, F&Gs and PLC's Control Panels.

## General Characteristics:

- Infra-red, Catalytic, Electrochemical and PID sensor
- 4-20 mA analog output
- 2 adjustable Alarm level relay contacts
- 1 line, 4 characters LCD display screen
- -20 to +55 C operating temperature
- Stainless steel sensor casing
- Easy Calibration by means of Remote Control
- Aluminum die-cast or Stainless steel casing material
- Normal, Fault and Alarm local LED indication
- Visual alarm rotating LEDs with different frequencies and colors for normal and alarms indication

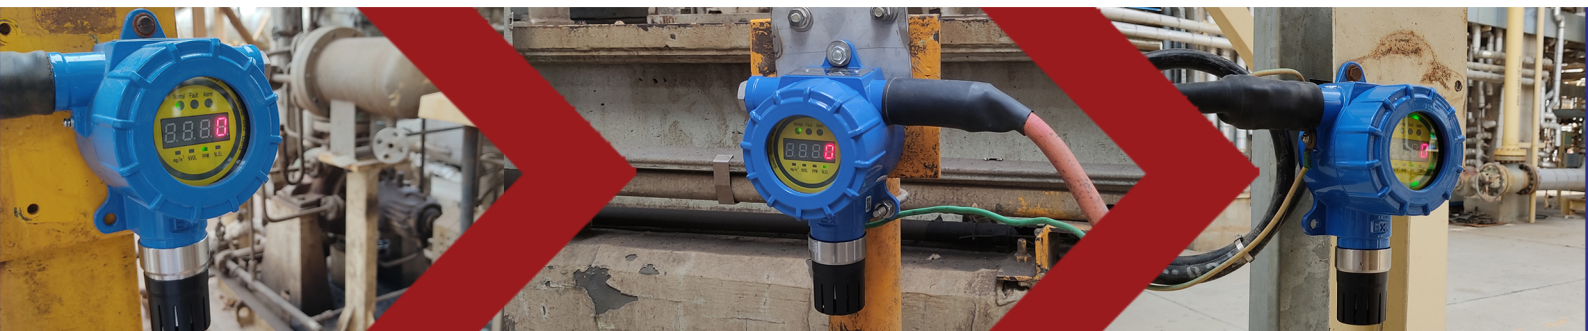

## Flammable and Toxic Gas Detector

**Model: SGD-2000**



### Technical Details:

Description	Rating	Description	Rating
Sensor	According to Gas List	Humidity	95 % RH
Measuring type	Diffusion type	Cable Type	3 x 1.5 mm <sup>2</sup> for 4-20 mA
Range	According to Gas List	Entry Size	2 x M20
Response time	According to Gas List	Casing Material	Aluminum Die-cast (Option SS 316)
Parameter control	Remote control	Sensor Material	SS 316
Output Signal	4-20 mA standard signal	Dimension	195 x 121 x 95 mm
Relay output	2 adjustable alarm relay 3A-24 VDC/ 3A 125 VAC (Option 1 alarm and fault relay)	Weight	Appx. 1.5 Kg
Power supply	16-30 VDC @ 400 mA max	Ingress Protection (IP)	65
Temperature	-20 to +55 C	Certification	II 2G Ex db IIC T6 Gb ATEX approved

### Accessories Ordering Number:

Item	Description	Ordering Code
1	Calibration Cap:	SGD2CC
2	Remote Control:	SGD2RC
3	Sunshade:	SGD2SS
4	Pipe mount 2" U Bolt:	SGD2PM

# Flammable and Toxic Gas Detector

**Model: SGD-2000**

**Gas List/Models:**

Item	Model	Target Gas	Range	Optional Range	Accuracy	Sensor Type	Response time sec
1	SGD-2000-CombCata	Combustible Gas	0-100 %LEL	100 %LEL	<±3%	Catalytic	<10
2	SGD-2000-CombIR	Combustible Gas	0-100 %LEL	100 %VOL	<±3%	IR	<20
3	SGD-2000-VOC	VOC	0-1000 ppm	0-2000 ppm	<±3%	PID	<5
4	SGD-2000-O2	O2	0-30 %VOL	0-25 %VOL	<±0.1%	Electro-Chemical	<15
5	SGD-2000-CO	CO	0-1000 ppm	0-2000/3000/5000 ppm	<±3%	Electro-Chemical	<25
6	SGD-2000-SO2	SO2	0-20 ppm	0-50/100/200/2000 ppm	<±3%	Electro-Chemical	<45
7	SGD-2000-NO2	NO2	0-20 ppm	0-50/100 ppm	<±3%	Electro-Chemical	<30
8	SGD-2000-Cl2	Cl2	0-20 ppm	0-50/100 ppm	<±3%	Electro-Chemical	<60
9	SGD-2000-H2S	H2S	0-100 ppm	0-200/500/1000 ppm	<±3%	Electro-Chemical	<35
10	SGD-2000-NH3	NH3	0-100 ppm	0-200/300/500/1000 ppm	<±3%	Electro-Chemical	<90
11	SGD-2000-H2	H2	0-1000 ppm	0-200 ppm	<±3%	Electro-Chemical	<70
12	SGD-2000-O3	O3	0-100 ppm	0-500 ppm	<±3%	Electro-Chemical	<45
13	SGD-2000-NO	NO	0-250 ppm	0-500 ppm	<±3%	Electro-Chemical	<30
14	SGD-2000-HCl	HCl	0-20 ppm	0-50/100 ppm	<±3%	Electro-Chemical	<70
15	SGD-2000-HCN	HCN	0-100 ppm	100 ppm	<±3%	Electro-Chemical	<20
16	SGD-2000-HF	HF	0-20 ppm	0-50/100 ppm	<±3%	Electro-Chemical	<120
17	SGD-2000-ClO2	ClO2	0-20 ppm	0-50/100 ppm	<±3%	Electro-Chemical	<60
18	SGD-2000-COCl2	COCl2	0-1 ppm		<±3%	Electro-Chemical	<120
19	SGD-2000-CH2O	CH2O	0-100 ppm	0-200/1000 ppm	<±3%	Electro-Chemical	<120
20	SGD-2000-ETO	ETO	0-100 ppm	0-200 ppm	<±3%	Electro-Chemical	<120
21	SGD-2000-CO2	CO2	0-5000 ppm	0-100 % Vol	<±3%	IR	<20
22	SGD-2000-N2O	N2O	0-1000 ppm		<±3%	IR	<20

- For Hydrocarbons such as Methane, Ethane, Propane, Butane and etc, IR sensor of Item 2 and Catalytic sensor of Item 1 can Be selected
- For Hydrogen Catalytic sensor of Item 1 can be selected.