




DIMENSION (Unit : mm)

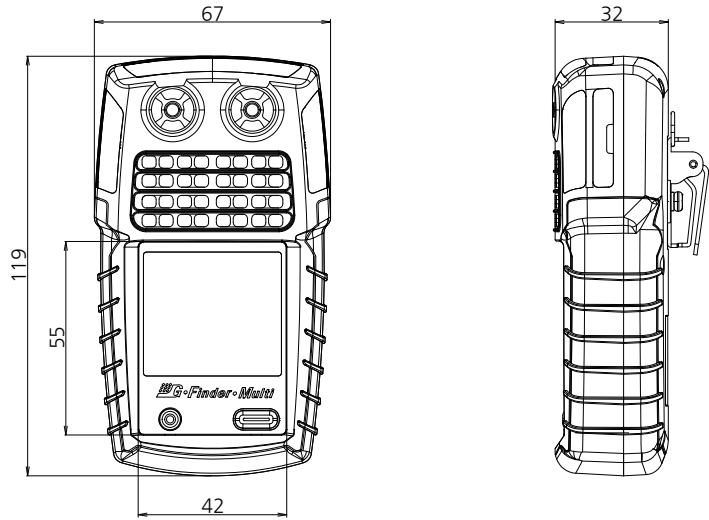

Multi Gas Portable Detector

G-Finder Multi

ACCURATE

- Real-time gas detection and display
- Periodic Bump Test Cycle Notification Function
- Regular Calibration Period Notification Function

CONVINIENT

- 2 years warranty without replacement of battery and sensor
- Easy to operate with one button

OTHERS

- BLUETOOTH 5.0

SPECIFICATION

※ Specifications are subject to be changed without prior notice

G-Finder Multi																					
Case Material	PolyCarbonate + Thermoplastic PolyUrethane																				
Dimension	119 x 67 x 42 mm (alligator clip included)																				
Weight	223 g (alligator clip included)																				
Operating Temperature	-20 ~ 50 °C																				
Operating Humidity	5 ~ 95 % r.h.																				
Alarms	Visual, Vibrating, Audible																				
Ingress Protection	IP 68																				
Sensors	O2 / CO / H2S – Electrochemical sensor technology CH4 – Non-dispersive infrared sensor																				
Display	Liquid Crystal Display (LCD)																				
Battery	3.6V Primary lithium-thionyl chloride (Li-SOCl2)																				
Measuring Ranges	<table border="1"> <thead> <tr> <th>Gas</th> <th>Symbol</th> <th>Range</th> <th>Increments</th> </tr> </thead> <tbody> <tr> <td>Oxygen</td> <td>O2</td> <td>0 ~ 25 % vol</td> <td>0.1 % vol</td> </tr> <tr> <td>Carbon Monoxide</td> <td>CO</td> <td>0 ~ 300 ppm</td> <td>1 ppm</td> </tr> <tr> <td>Hydrogen Sulfide</td> <td>H2S</td> <td>0 ~ 100 ppm</td> <td>1 ppm</td> </tr> <tr> <td>Methane</td> <td>CH4</td> <td>0 ~ 100 %LEL</td> <td>1 %LEL</td> </tr> </tbody> </table>	Gas	Symbol	Range	Increments	Oxygen	O2	0 ~ 25 % vol	0.1 % vol	Carbon Monoxide	CO	0 ~ 300 ppm	1 ppm	Hydrogen Sulfide	H2S	0 ~ 100 ppm	1 ppm	Methane	CH4	0 ~ 100 %LEL	1 %LEL
	Gas	Symbol	Range	Increments																	
	Oxygen	O2	0 ~ 25 % vol	0.1 % vol																	
	Carbon Monoxide	CO	0 ~ 300 ppm	1 ppm																	
Hydrogen Sulfide	H2S	0 ~ 100 ppm	1 ppm																		
Methane	CH4	0 ~ 100 %LEL	1 %LEL																		
Factory Alarm Setpoints	<table border="1"> <thead> <tr> <th>Gas</th> <th>Symbol</th> <th>Low Alarm</th> <th>High Alarm</th> </tr> </thead> <tbody> <tr> <td>Oxygen</td> <td>O2</td> <td>19.5 % vol</td> <td>23.5 % vol</td> </tr> <tr> <td>Carbon Monoxide</td> <td>CO</td> <td>35 ppm</td> <td>200 ppm</td> </tr> <tr> <td>Hydrogen Sulfide</td> <td>H2S</td> <td>10 ppm</td> <td>15 ppm</td> </tr> <tr> <td>Methane</td> <td>CH4</td> <td>10 %LEL</td> <td>20 %LEL</td> </tr> </tbody> </table>	Gas	Symbol	Low Alarm	High Alarm	Oxygen	O2	19.5 % vol	23.5 % vol	Carbon Monoxide	CO	35 ppm	200 ppm	Hydrogen Sulfide	H2S	10 ppm	15 ppm	Methane	CH4	10 %LEL	20 %LEL
	Gas	Symbol	Low Alarm	High Alarm																	
	Oxygen	O2	19.5 % vol	23.5 % vol																	
	Carbon Monoxide	CO	35 ppm	200 ppm																	
Hydrogen Sulfide	H2S	10 ppm	15 ppm																		
Methane	CH4	10 %LEL	20 %LEL																		
Certifications	IECEX Ex ia IIC T4 Ga (IECEX KTL 19.0028X)																				
	ATEX Ex ia IIC T4 Ga (DEKRA 19ATEX0132X)																				
	KCs Ex ia IIC T4 Ga (19-KA2BO-0915X)																				
	NEPSI Ex ia IIC T4 Ga (인증 전환 진행중)																				
	KC R-C-G99-GFM-400																				
블루투스 SIG	Declaration ID D048182																				